


# EGO30 COOLING UNITS FOR DOOR OR WALL MOUNTING

| Characteristics                           | M.U.              | EGO30BT1B                                 | EGO30LT1B    |
|---|-------------------|---|--------------|
| Cooling capacity EN814 - A35A35           | W                 | 2900                                      | 2900         |
| Cooling capacity EN814 - A35A50           | W                 | 2250                                      | 2250         |
| Power supply                              | V ~ Hz            | 230 1~ 50-60                              | 400 3~ 50-60 |
| Width                                     | mm                | 500                                       | 500          |
| Height                                    | mm                | 1270                                      | 1270         |
| Depth                                     | mm                | 336                                       | 336          |
| Max. current                              | A                 | 8,2                                       | 2,6          |
| Inrush current                            | A                 | 37,4                                      | 14           |
| Fuse T                                    | A                 | 16  | 6            |
| Absorbed electric power EN814 - A35A35    | W                 | 1340                                      | 1220         |
| Absorbed electric power EN814 - A35A50    | W                 | 1560                                      | 1440         |
| Duty cycle                                | -                 | 100%                                      | 100%         |
| Electrical connection                     | -                 | 4 pole plug                               | 4 pole plug  |
| Refrigerant R134a                         | Kg                | 0,84                                      | 0,84         |
| Cooling circuit max. pressure             | bar               | 25  | 25           |
| External fan air flow                     | m <sup>3</sup> /h | 1450                                      | 1450         |
| Enclosure fan air flow                    | m <sup>3</sup> /h | 860                                       | 860          |
| Internal temperature range                | °C                | 20-46                                     | 20-46        |
| Temperature setting                       | -                 | Electronic thermostat factory set at 35°C |              |
| External temperature range                | °C                | 20-50                                     | 20-50        |
| Protection level EN60529 - enclosure side | -                 | IP54                                      | IP54         |
| Protection level EN60529 - ambient side   | -                 | IP34                                      | IP34         |
| Noise level                               | dB (A)            | 70  | 70           |
| Weight                                    | Kg                | 80  | 84           |
| Conformity                                | -                 | CE  | CE           |
| Colour                                    | -                 | RAL 7035 orange peel effect               |              |


| Accessories/Options              |           |
|----------------------------------|-----------|
| Pack of 5 cloth air filters      | C15000183 |
| Pack of 1 metal air filter       | C15000185 |
| Semi-recessed assembly structure |           |
| Stainless steel version          |           |
| Special paint on request         |           |
|                                  |           |
|                                  |           |



## Dimensions

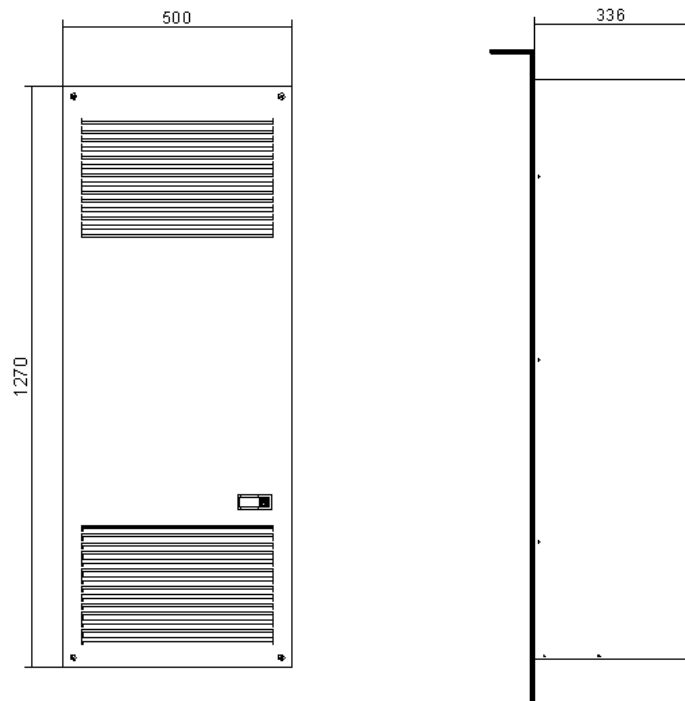

## Performances

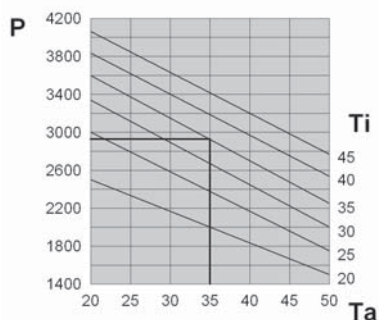

P = Cooling capacity (W)  
 Ta = Ambient temperature (°C)  
 Ti = Inside enclosure temperature (°C)